

# IXIO-D

## OPENING AND SAFETY SENSOR FOR AUTOMATIC SLIDING DOORS

Commercial sheet



### THE SECOND-GENERATION DUAL SENSOR

#### DESCRIPTION



The **IXIO-D** is a sensor which combines radar technology for the activation of the door with infrared technology for the user protection. The unidirectional radar enables energy savings to be made. The three-dimensional infrared curtain protects people from any contact with the doors.

COMPLIANT WITH  
**EN 16005/DIN 18650**



#### UNIDIRECTIONAL

Due to the unidirectionality, the duration of the door opening cycle is shorter, which reduces heat loss from the building and saves energy. This also optimises the "airlock" function.



#### INFRARED CURTAINS

48 high-density infrared spotlights from 2 curtains protect users from any contact with the doors.

A 32-bit microprocessor optimises the processing of information coming from the environment, ensuring a stable performance throughout the year.

#### LCD


Intuitive configuration with an LCD screen with an LCD screen displaying texts and symbols (LCD graphics).



#### SAFETY


4 red spotlights visible on the ground to adjust the angle of the failsafe curtain.






APPLICATIONS

Single leaf sliding doors




DETECTION RANGE

Double leaf sliding doors

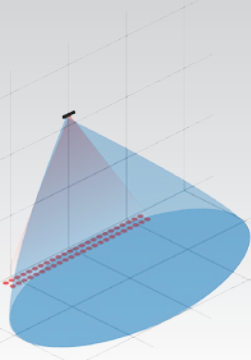


DETECTION RANGE

Area detection radar 4 m x 2 m @ 2.2 m  
infrared 2,2 m x 0,5 m @ 2,2 m





IXIO RANGE

IXIO-S  
Presence sensor with infrared technology  
for the safety of sliding doors



TOOL

Download the **BEA DECODER** app  
for a quick overview of settings

## APPLICATIONS

- Opening and safety of linear, telescopic and curved automatic sliding doors.

## EASE OF INSTALLATION

- Intuitive configuration thanks to an LCD screen and/or a BEA remote control.
- LCD graphics screen with choice of language.
- 10 adjustment options for the IR curtains.
- Lateral orientation from -15° to +15° for the radar antenna.
- 4 infrared spotlights visible on the ground for the easy adjustment of the failsafe curtain.
- Plug, push & go.
- The ZIP code is a compression of all sensor settings in encoded format (which can be decoded by the BEA DECODER app).

## VERSIONS

- **IXIO-DT1**: dual sensor with combined technologies and self-monitoring.
- **IXIO-DT3**: dual sensor with combined technologies for emergency doors and standard doors. 3-in-1 product with choice of 3 types of output (current/frequency/relay).
- **IXIO-DP1**: dual sensor with combined technologies for pulsed safety door controllers
- **IXIO-DP3**: dual sensor with combined technologies for emergency doors and standard doors with pulsed safety door control.

## ACCESSORIES



## TECHNICAL SPECIFICATIONS

<b>Detection mode</b>	Motion	Presence
<b>Technology</b>	Microwave doppler radar	Active infrared with background analysis
<b>Output</b>	Solid-state-relay (potential and polarity free) - in switching mode : NO/NC - in frequency mode*: pulsed signal (f = 100 Hz +/- 10%)  Current source output*	Solid-state-relay (potential and polarity free)  Pulse output**
<b>Test input</b>	Sensitivity : Low : < 1 V; High : > 10 V	
<b>Supply voltage</b>	12 V - 24 V AC +/-10%; 12 V - 30 V DC +/- 10%	
<b>Mounting height</b>	2 m to 3,5 m (local regulations may have an impact on the acceptable mounting height)	
<b>Temperature range</b>	-25°C to +55°C; 0-95% relative humidity, non condensing	
<b>Degree of protection</b>	IP54	
<b>Applicable directives /Norms</b>	R&TTE 1999/5/EC; MD 2006/42/EC; LVD 2006/95/EC; ROHS 2 2011/65/EU; EN 12978; DIN 18650-1:2010 Chapter 5.7.4; AutSchR; BS 7036-1:1996 Chapter 7.3.2; EN ISO 13849-1:2008 PL «c» CAT. 2(under the condition that the door control system monitors the sensor at least once per door cycle); IEC 61496-1:2012 ESPE Type 2; EN 16005:2012 Chapter 4.6.8; BS 7036-1:1996 Chapter 8.1	

\* DT3/DP3 \*\*DP1/DP3

Specifications are subject to change without prior notice.  
All values measured in specific conditions.

**DISCLAIMER** This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.



## IXIO-D OPENING AND SAFETY SENSOR FOR AUTOMATIC SLIDING DOORS

BEA s.a. / LIEGE Science Park / Allée des Noisetiers 5 / 4031 Angleur • BELGIUM  
T +32 (0)4 361 65 65 / F +32 (0)4 361 28 58 / E info@bea.be